


# District 5 2008 Construction Season

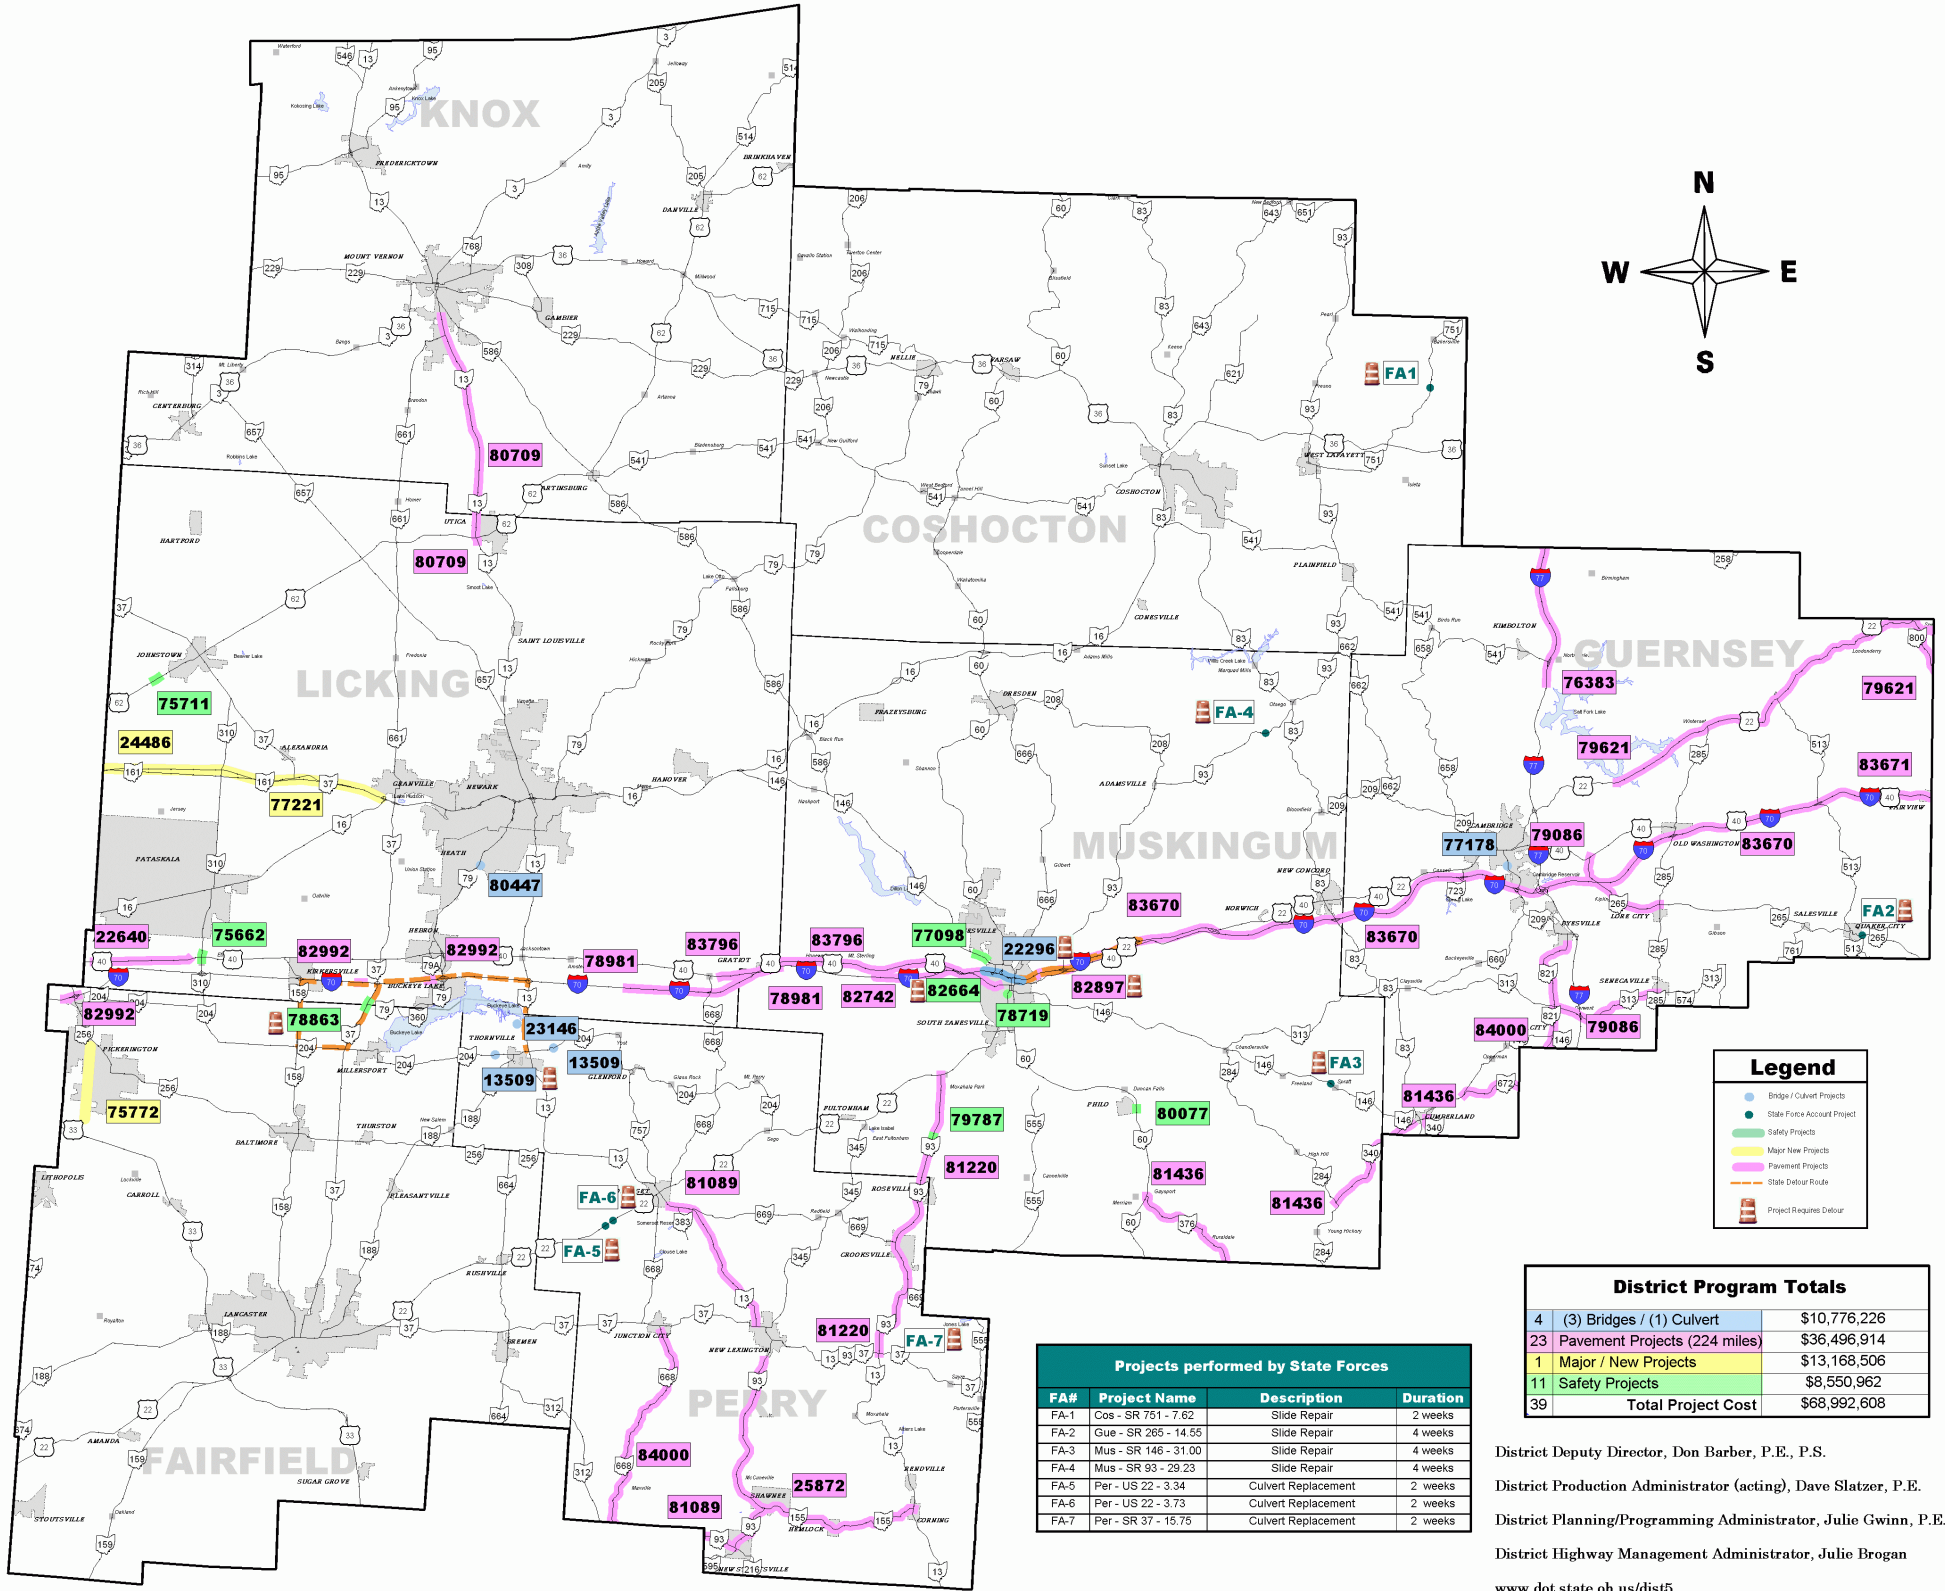

**Projects performed by State Forces**

| FA#  | Project Name         | Description         | Duration |
|------|----------------------|---------------------|----------|
| FA-1 | Cos - SR 751 - 7.62  | Slide Repair        | 2 weeks  |
| FA-2 | Gue - SR 265 - 14.55 | Slide Repair        | 4 weeks  |
| FA-3 | Mus - SR 146 - 31.00 | Slide Repair        | 4 weeks  |
| FA-4 | Mus - SR 93 - 29.23  | Slide Repair        | 4 weeks  |
| FA-5 | Per - US 22 - 3.34   | Culvert Replacement | 2 weeks  |
| FA-6 | Per - US 22 - 3.73   | Culvert Replacement | 2 weeks  |
| FA-7 | Per - SR 37 - 15.75  | Culvert Replacement | 2 weeks  |

District Deputy Director, Don Barber, P.E., P.S.  
 District Production Administrator (acting), Dave Slatzer, P.E.  
 District Planning/Programming Administrator, Julie Gwinn, P.E.  
 District Highway Management Administrator, Julie Brogan  
[www.dot.state.oh.us/dist5](http://www.dot.state.oh.us/dist5)

| PID   | Project Name                     | Project Type                 | Award Date | Estimated Construction Cost | Description  | Innovative Contracting  |
|-------|----------------------------------|------------------------------|------------|-----------------------------|--|-------------------------|
| 13509 | PER SR 204 1.60                  | Bridge Replacement           | 06/26/08   | \$1,301,018                 | Replace a steel beam bridge (Structure 6402135) carrying SR 204 over Jonathan Creek and replace structure 6402089 over a Tributary of Honey Creek.   | A + B                   |
| 21473 | D05 PCS FY2009                   | Crack Seal - Priority Sys.   | 08/28/08   | \$213,799                   | Preventive maintenance crack sealing on the Priority System.   |                         |
| 21632 | D05 GCS FY2009                   | Crack Seal - General Sys.    | 08/28/08   | \$464,774                   | Preventive maintenance crack sealing on the General System.  |                         |
| 22296 | MUS IR 70 10.69                  | Bridge Replacement           | 12/27/07   | \$6,811,962                 | Replacement and/or repairs of decks, abutments and approach slabs for 6 IR 70 bridges, 6 entrance ramps and resurfacing of the mainline in Zanesville.   | Incentive /Disincentive |
| 22640 | LIC US 40 0.58                   | Resurfacing                  | 12/27/07   | \$5,790,172                 | Pavement rehabilitation with addition of center turn lane.   | Incentive /Disincentive |
| 23146 | PER CR 2 02.45                   | Bridge Replacement           | 03/31/08   | \$705,898                   | Replace bridge on County Road 2 (over Buckeye Lake Channel).   |                         |
| 24486 | FRA/LIC SR 161 23.20/0.00-Ph 1   | New Construction             | 05/11/06   |                             | Extension of limited access highway from New Albany Bypass to just west of Simpson's Run, Phase 1. There will be five structures on the project: (1&2) mainline structures over Mink Rd L & R, (3&4) mainline structures over Beech Rd L & R, (5) SR 310 structure over the mainline.  |                         |
| 25210 | D05-PM-FY2008(B) - Poly          | Pavement Marking             | 02/21/08   | \$649,458                   | District wide Poly Paint striping project.   |                         |
| 25211 | D05-PM-FY2008(A) - Fast Dry      | Pavement Marking             | 02/21/08   | \$223,039                   | District wide fast dry paint contract for centerline and auxiliary markings.   |                         |
| 25212 | D05 RPM FY2008                   | Pavement Marking             | 01/17/08   | \$159,187                   | District wide RPM contract on various state routes for FY 2008.  |                         |
| 25213 | D05-MOW-FY2008/FY2009            | Mowing                       | 02/01/08   | \$121,155                   | Interstate mowing two year contract for FY 2008 & 2009.  |                         |
| 25872 | PER SR 155 00.00                 | Chip Seal                    | 03/13/08   | \$199,973                   | Single Chip Seal on SR 155.  |                         |
| 75662 | LIC SR 310 1.61                  | Intersection Improvement     | 06/12/08   | \$952,853                   | Construct left turn lanes on SR 310 at the intersection with US 40.  |                         |
| 75711 | LIC US 62 2.41 (Duncan Plains)   | Intersection Improvement     | 04/03/08   | \$961,037                   | Construct left turn lanes and construct a signal on US 62 at the intersection with CR 33 (Duncan Plains Rd).   |                         |
| 75772 | FAI TR 207 (Diley Rd Phase 1&2)  | Major Widening               | 12/20/07   | \$13,168,506                | Reconstruct and widen Diley Road to 5 lanes. Construction will start approximately 2,200' south of SR 256 and proceed to Busey Road and connect to township road improvement project. Both phases to be sold under this project. Includes storm sewers, water line and sanitary sewers.  |                         |
| 76383 | GUE IR 77 17.26                  | Resurfacing                  | 10/01/08   | \$4,052,290                 | Resurfacing with related work.   |                         |
| 77098 | MUS SR 146 12.29 (OUZ)           | Signals                      | 04/03/08   | \$1,202,685                 | Widen to add turn lanes and installation of signals at the entrance to the Ohio University of Zanesville/Muskingum Area Technical College  |                         |
| 77178 | GUE Campbell Ave                 | Bridge Replacement           | 11/01/07   | \$1,653,488                 | Replace Campbell Avenue Bridge over Wills Creek.   |                         |
| 77221 | LIC SR 161/37 6.65/10.25-Phase 2 | New Construction             | 04/26/07   |                             | Construction of new 4-lane facility on new alignment from just west of Simpson's Run to the existing 4-lane just west of Granville. There will be 8 structures. 1&2) L & R mainline structures over Simpson Run 3&4) L & R mainline structures over Moots Run 5&6) L & R mainline structures over Chinney Creek 7) SR 37 interchange overpass 8) Outville Rd Overpass. |                         |
| 78684 | D05-SIGN-FY2007                  | Signs                        | 03/13/08   | \$917,575                   | Sign replacement project on Interstate 77 and the interstate look-alikes.  |                         |
| 78719 | MUS Sixth Street Enhancement     | Add Sidewalks                | 03/13/08   | \$1,169,970                 | The 6th Street Enhancement Project will consist of approximately 2600 lineal feet of construction. Included in the scope of work is curbing replacement the full length on both sides, intermittent sidewalk replacement as required, a 6 bank conduit corridor.   |                         |
| 78863 | LIC SR 37 25.58                  | Turn Lane Addition           | 03/13/08   | \$618,835                   | Addition of a turn lane on State Route 37 at the intersection of SR 37 and SR 79.  | Incentive /Disincentive |
| 78981 | LIC IR 70 23.84                  | Resurfacing - Divided System | 01/17/08   | \$1,926,660                 | Resurfacing of Lic IR 70 23.84 to 28.93 and Mus IR 70 0.00-0.76  |                         |
| 79086 | GUE SR 313 9.92                  | Mill and Fill                | 06/12/08   | \$657,425                   | Double chip seal of SR 265 and single chip seal of SR 313 with a 1-1/4" asphalt overlay.   |                         |
| 79621 | GUE US 22 14.62                  | Resurfacing                  | 03/13/08   | \$2,669,422                 | Resurfacing with related work.   |                         |
| 79787 | MUS SR 93 1.76                   | Slide Repair                 | 04/03/08   | \$859,694                   | Transitional failure slip approximately 500 feet in length located at the 1.76 mile marker.FY 2008 Geological Site Management Program.   |                         |
| 80077 | MUS SR 60 7.15                   | Slide Repair                 | 10/01/08   | \$545,901                   | Landslide repair on south bound side between guardrail and river.  |                         |
| 80447 | LIC Bike Tunnel                  | Bikeways                     | 12/20/07   | \$303,860                   | Dual use path tunnel and approaches under Irving/Wick Drive within the City of Heath. Constructed between Barb Avenue and Liberty Drive.   |                         |
| 80709 | LIC SR 13 22.39                  | Resurfacing                  | 10/04/07   | \$1,154,230                 | Preventative Maintenance resurfacing with related work.  |                         |
| 81089 | D05 GPM FY2009                   | Preventive Maintenance       | 08/14/08   | \$1,543,076                 | Preventive Maintenance on the General System potentially using smooth seal as a surface treatment.   |                         |
| 81220 | PER/MUS SR 93 17.89/00.00        | Mill and Fill                | 07/01/08   | \$2,940,701                 | Resurfacing with related work on portions of SR 93 in Perry & Muskingum counties.  |                         |
| 81436 | MUS SR 340 0.00                  | Mill and Fill                | 06/12/08   | \$618,135                   | 2" mill & fill. Double chip seal with a fog seal finish.   |                         |
| 82123 | D05 GR FY2007/FY2008             | Guardrail Rebuilding         | 03/23/07   | \$527,575                   | District wide Ding N Dent Contract to replace damaged Guardrail on interstate & interstate look alike.   |                         |
| 82664 | MUS IR 70 11.00                  | Slide Repair                 | 01/17/08   | \$379,269                   | Clean up of hill side that has slipped onto the on ramp of IR 70 WB. Construction of a bench with backslope cut back using pre-split blasting.   |                         |
| 82742 | MUS IR 70 (5.70-10.63)           | Resurfacing                  | 08/28/08   | \$1,505,115                 | Milling and filling from approximately 4.5 miles east of Gratiot to US 40 west of Zanesville.  |                         |
| 82897 | MUS SR 93 12.84                  | Reactive Maintenance         | 01/17/08   | \$1,189,840                 | Investigation and remediation of sink holes found in the vicinity of the Mus SR 93 Bridge over IR 70. Mine void grouting.  |                         |
| 82992 | FAI IR 70 0.75                   | Reactive Maintenance         | 05/15/08   | \$521,346                   | Milling and filling to level off transitions on and off of several bridges on IR 70 in Fairfield and Licking County  |                         |
| 83090 | D05 DSR FY2008                   | Earthwork                    | 11/01/07   | \$415,568                   | Installation of a barrier to eliminate the erosion of earth from around the drilled shaft walls. Continued erosion of the earth will undermine the roadway.  |                         |
| 83670 | MUS IR 70 0.00                   | Resurfacing - Divided System | 05/29/08   | \$930,306                   | Micro-surfacing of the driving lanes in both directions on IR 70 in Guernsey Co from 0.00 to 10.54 and EB driving lane from 10.54 to the Belmont Co Line. Then in Muskingum Co, the EB and WB passing lanes from 13.19 to the 27.33  |                         |
| 83671 | GUE IR 70 10.54                  | Resurfacing                  | 07/17/08   | \$3,064,160                 | Resurface west bound driving lanes from Belmont County line to 0.7 miles east of IR 77   |                         |
| 83796 | LIC/MUS US 40 28.60/00.00        | Minor Rehabilitation         | 07/31/08   | \$5,176,812                 | Milling off the surface and replacing with a 3/4" intermediate and 1-1/4" surface coat. Includes joint repair.   |                         |
| 84000 | GUE SR 821 0.00                  | Resurfacing                  | 06/12/08   | \$725,840                   | From Nob/Gue Co Line to Byesville in Guernsey and SR 93 in Hocking Co to Junction City in Perry  |                         |