




# MLK INTERCHANGE

PROJECT INFORMATION: HAM-71-3.81 | PID 77628 | #13-3026 | SPRING 2017 STATUS UPDATE

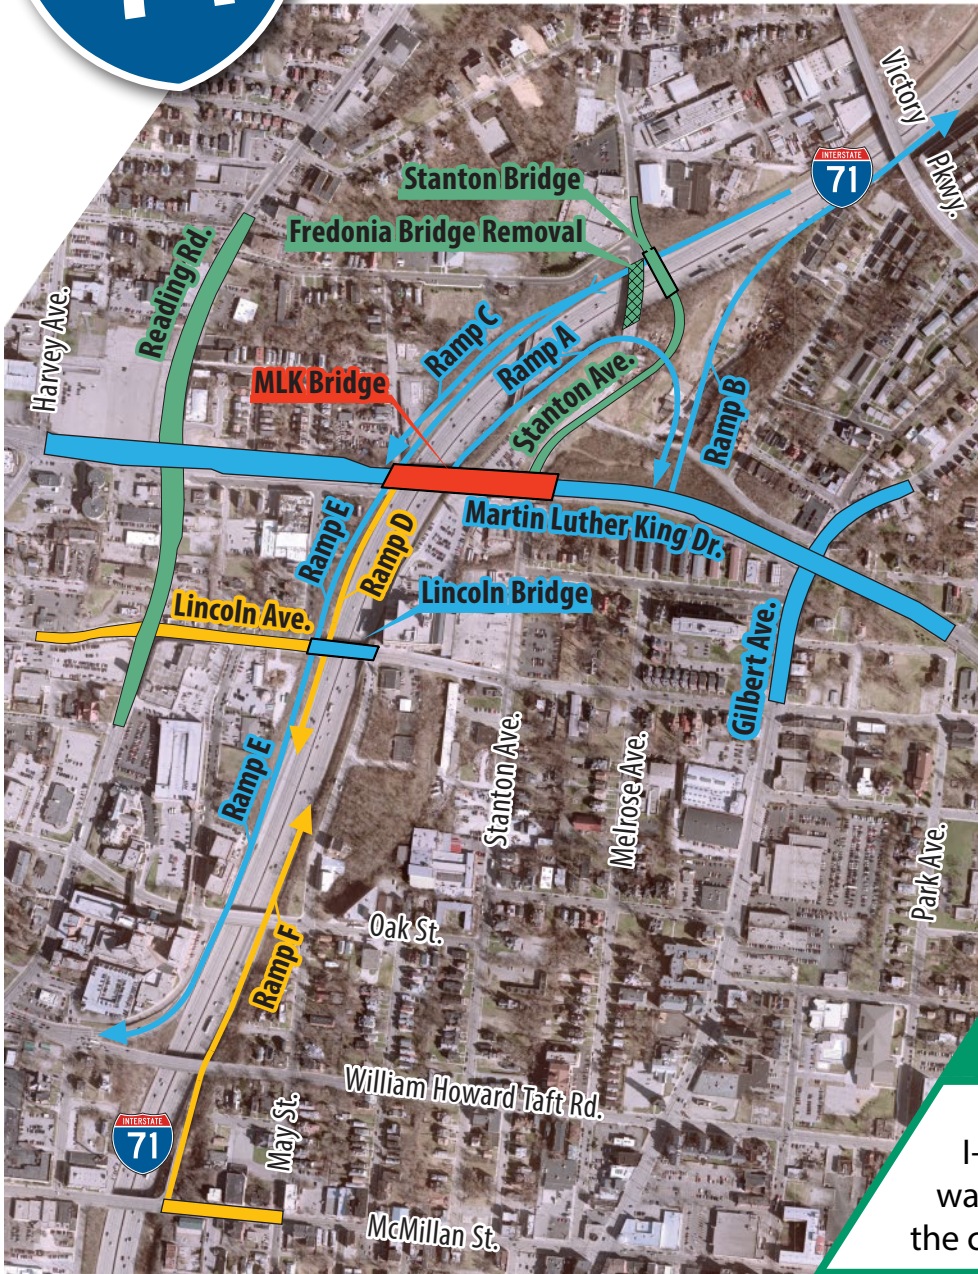

Year	Work Location	Start	Finish
2014	MLK Bridge – widen bridge over I-71 to six lanes	Fall 2014	Late Aug. 2017
2015	MLK Dr. – widening, turn-lane additions and dedicated bike/ped. path between Harvey Ave. and just beyond Gilbert Ave.	Spring 2015	Summer 2017
	Ramp A (northbound I-71 to MLK Dr.) – construct new off ramp	Spring 2015	Mid/Late June 2017
	Ramp B (MLK Dr. to northbound I-71) – construct new on ramp	Spring 2015	April 24, 2017
	Lincoln Bridge – bridge rehabilitation	Fall 2015	Spring 2017
	Ramp E (Southbound I-71 to WH Taft Rd.) – construct new off ramp	Summer 2015	Late May/ Early June 2017
	Ramp C (southbound I-71 to MLK Dr.) – construct new off ramp	Fall 2015	Spring 2017
	Gilbert Ave. – widening to add turn lanes at MLK Dr.	Fall 2015	Spring 2017
2016	Lincoln Ave. – widening to add turn lanes at Reading Rd.	Summer 2016	Spring 2017
	Ramp D (MLK Dr. to southbound I-71) – construct new on ramp	Summer 2016	August 2017
	Ramp F (McMillian St. to northbound I-71) – partial ramp widening and extension of two-way traffic on McMillian St. between May St. to I-71 Ramp F (Ramp F will be closed May 1 until July 1).	Winter 2016	Summer 2017
COMPLETE	Stanton Bridge – construct new bridge over I-71 (replaces existing Fredonia Bridge)	Fall 2014	COMPLETE
	Stanton Ave. – realign between MLK Dr. and Whittier St.	Summer 2015	COMPLETE
	Reading Rd. – widening to add turn lanes at Lincoln Ave. and MLK Dr.	Summer 2016	COMPLETE
	Fredonia Bridge Removal – remove existing bridge when new Stanton Ave. Bridge completed	Spring 2016	COMPLETE

NOTE: estimated schedule is subject to change

## PROJECT DESCRIPTION

Construct an approximately \$80 million new interchange at I-71 and Martin Luther King Drive to reduce travel time, simplify wayfinding, and promote economic vitality in the Uptown area of the city of Cincinnati.