



PART PLAN

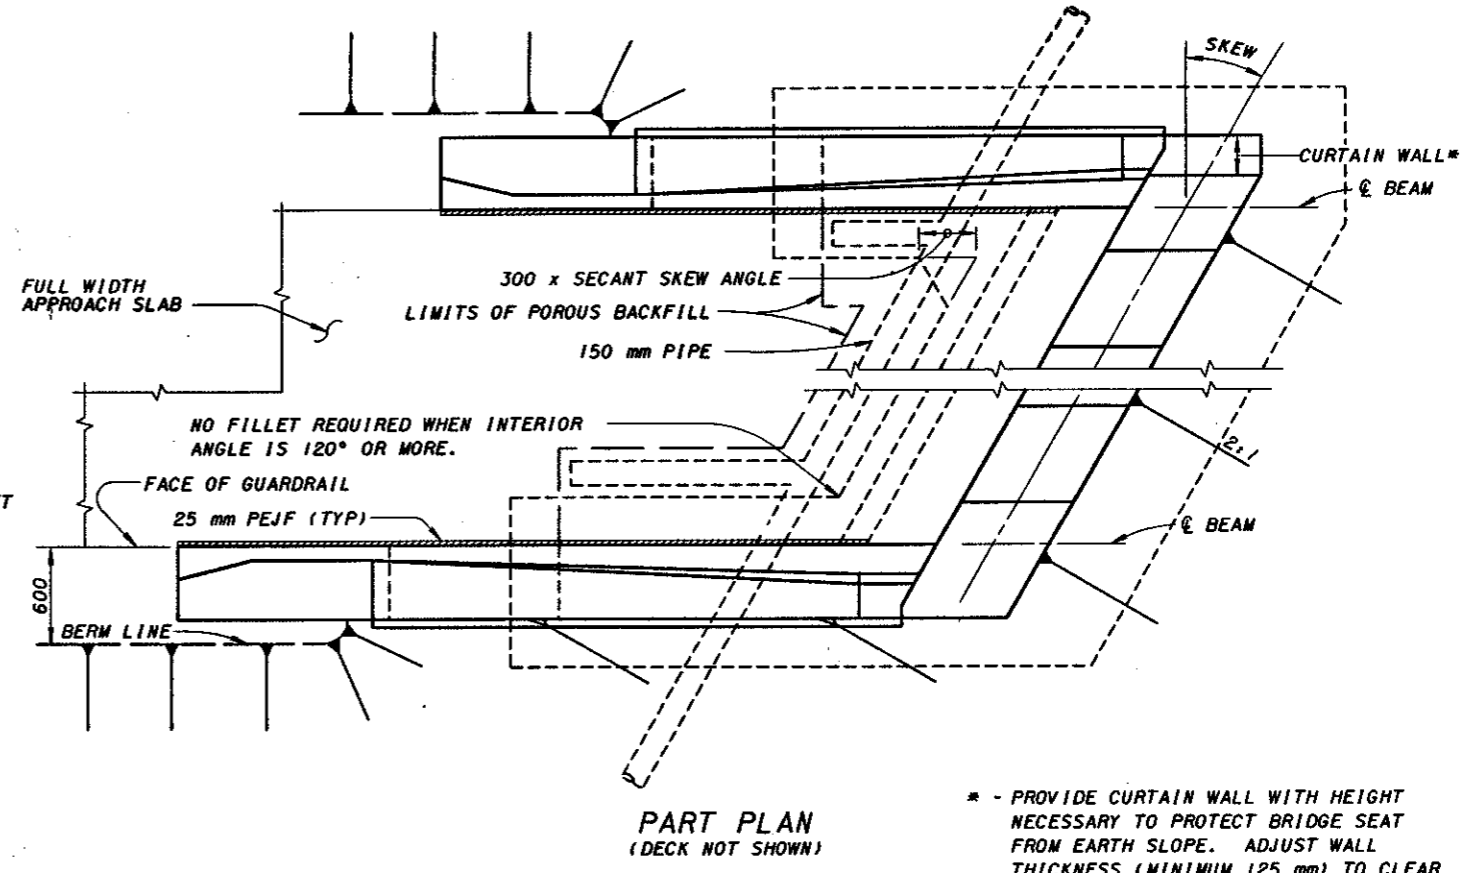


PART PLAN
(DECK NOT SHOWN)

* - PROVIDE CURTAIN WALL WITH HEIGHT NECESSARY TO PROTECT BRIDGE SEAT FROM EARTH SLOPE. ADJUST WALL THICKNESS (MINIMUM 125 mm) TO CLEAR BEARING BY A MINIMUM OF 50 mm.

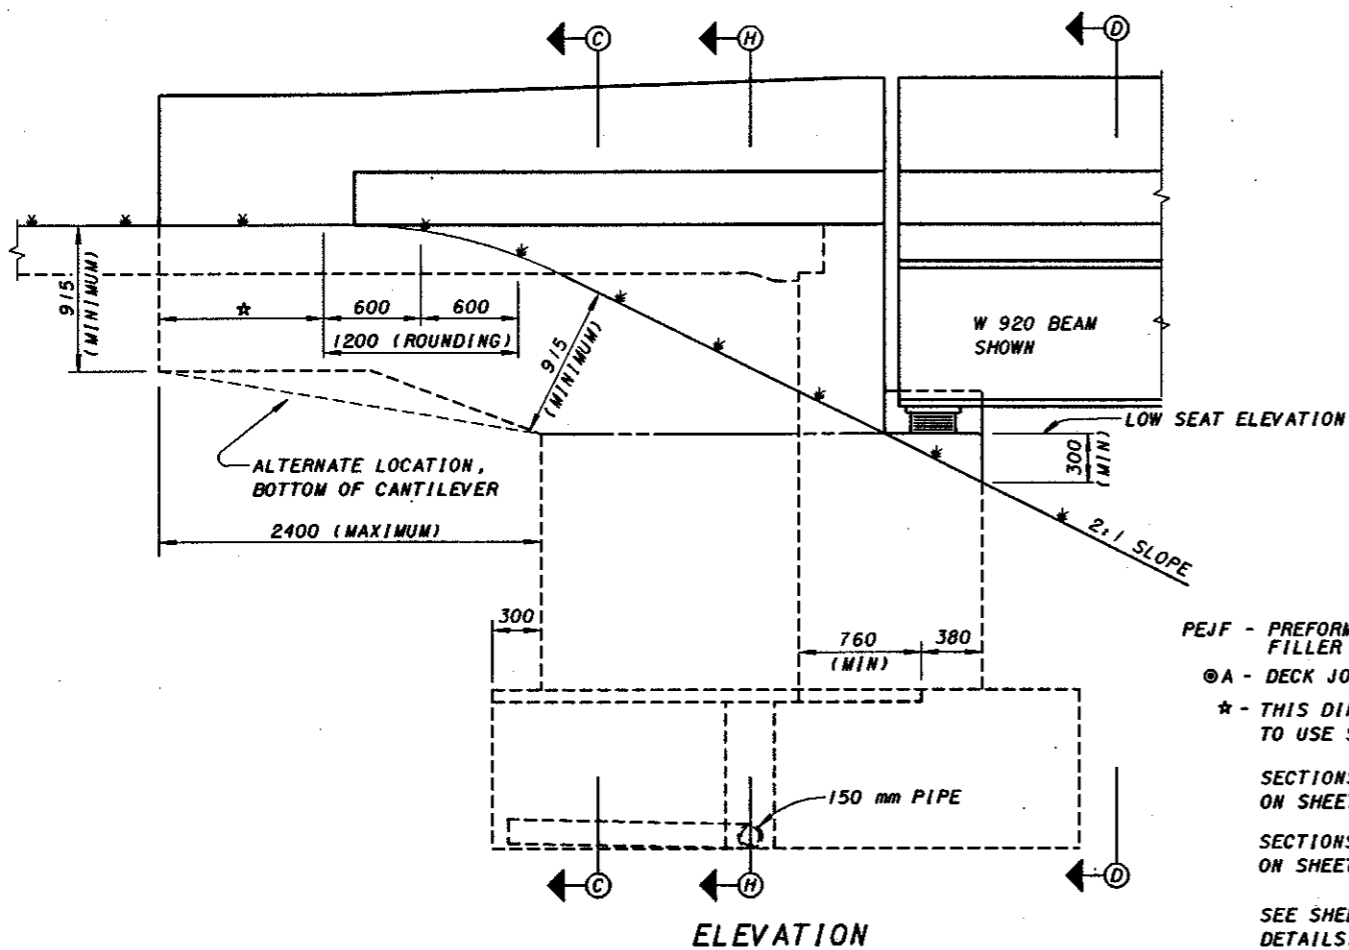

ELEVATION

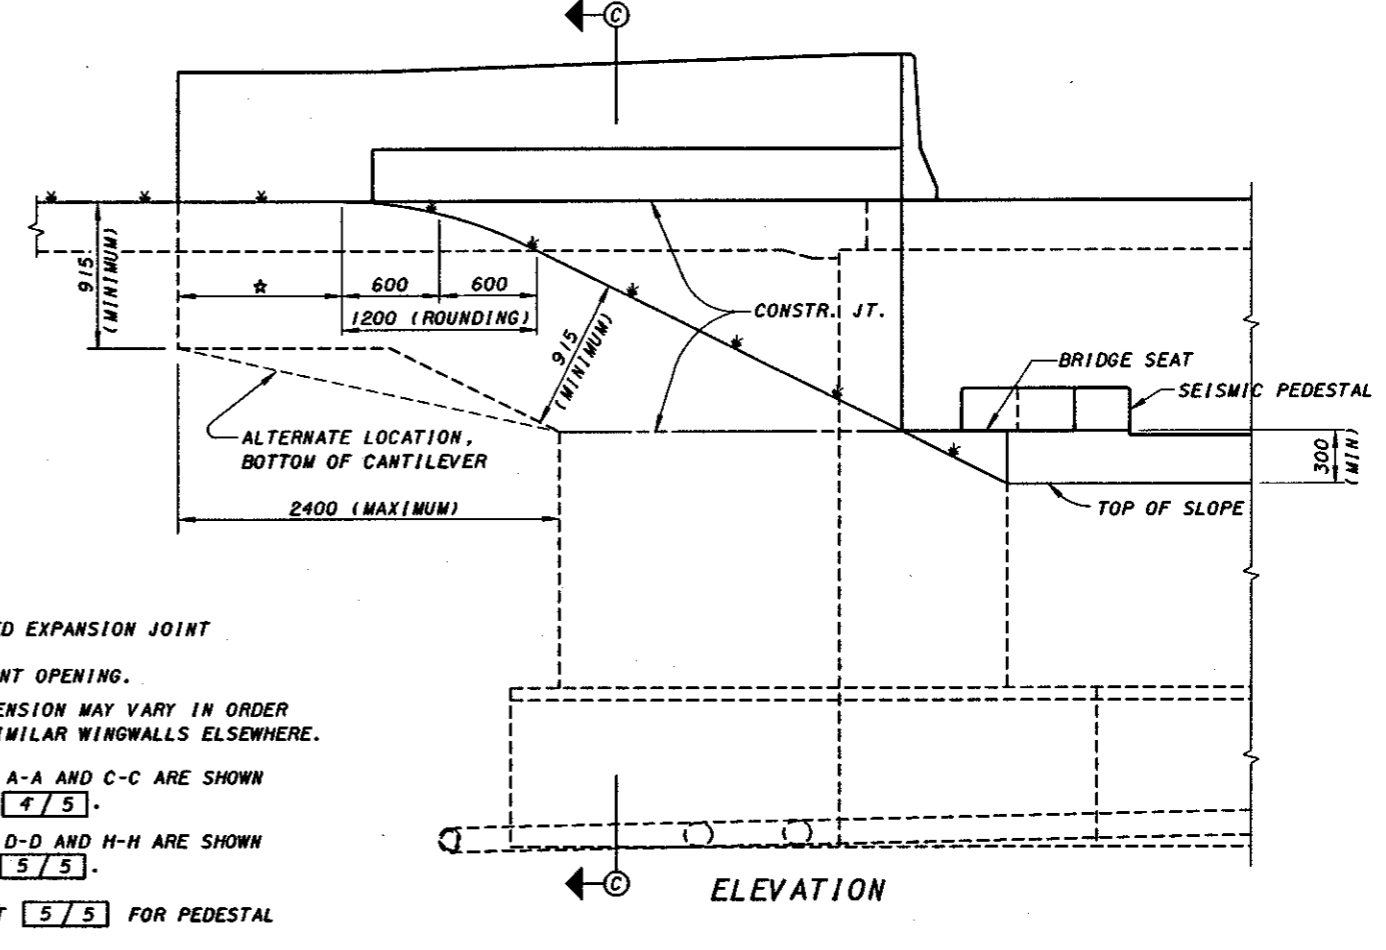

ELEVATION

PEJF - PREFORMED EXPANSION JOINT FILLER
 ⓐ - DECK JOINT OPENING.
 * - THIS DIMENSION MAY VARY IN ORDER TO USE SIMILAR WINGWALLS ELSEWHERE.
 SECTIONS A-A AND C-C ARE SHOWN ON SHEET 4/5.
 SECTIONS D-D AND H-H ARE SHOWN ON SHEET 5/5.
 SEE SHEET 5/5 FOR PEDESTAL DETAILS.

DESIGN AGENCY	BUREAU OF BRIDGES
STRUCTURAL DESIGN	
STATE OF OHIO DEPARTMENT OF TRANSPORTATION	DATE
ENGINEER OF BRIDGES	
CHECKED	REVIEWED
CPD/SAM	MPB/LMW
NRB/SAM	A-1-68W
DESIGNED	
CPD/SAM	
NRB/SAM	
STANDARD	
U TYPE ABUTMENTS	
FOR BRIDGES WITH	
ROADWAY PARAPET RAILING	
2	5