



PART PLAN

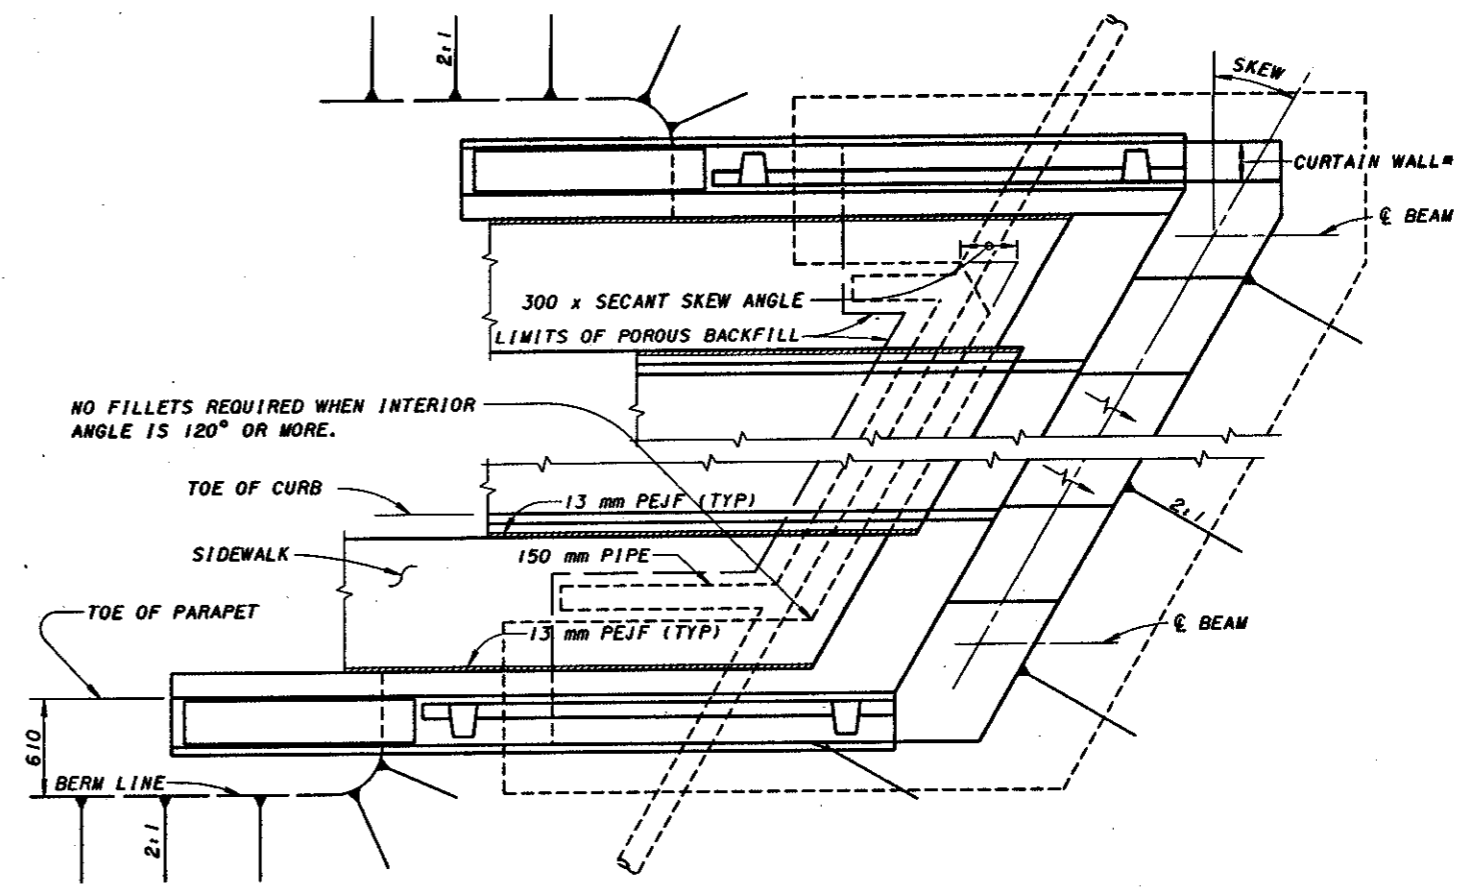


PART PLAN (DECK NOT SHOWN)

* - PROVIDE CURTAIN WALL WITH HEIGHT NECESSARY TO PROTECT BRIDGE SEAT FROM EARTH SLOPE. ADJUST WALL THICKNESS (MINIMUM 125 mm) TO CLEAR BEARING BY A MINIMUM OF 50 mm.

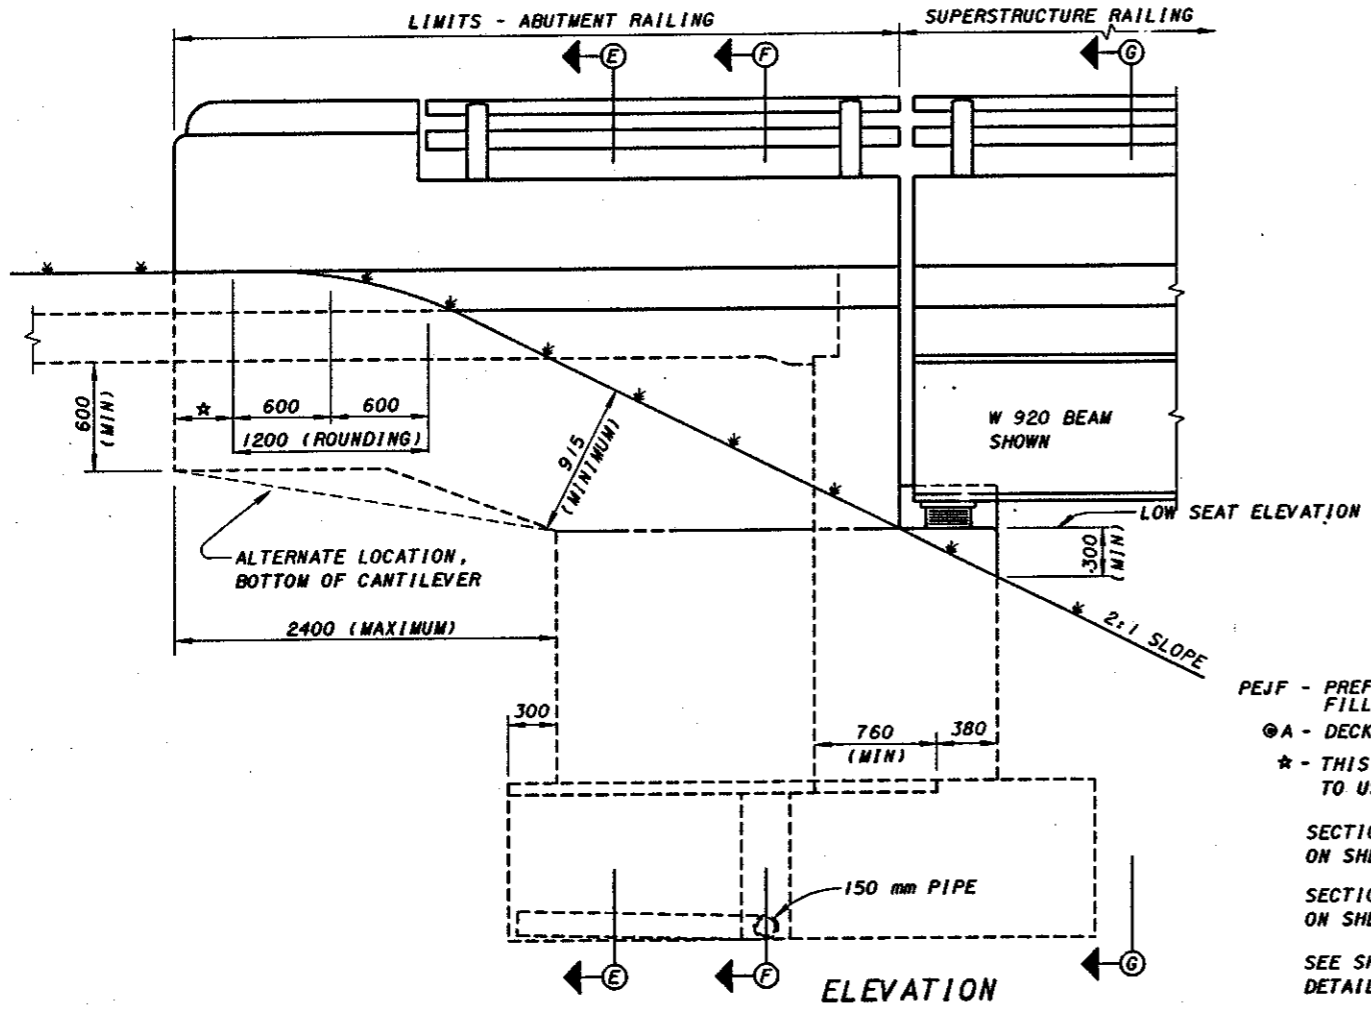

ELEVATION

PEJF - PREFORMED EXPANSION JOINT FILLER
 ⓐ - DECK JOINT OPENING.
 * - THIS DIMENSION MAY VARY IN ORDER TO USE SIMILAR WINGWALLS ELSEWHERE.
 SECTIONS A-A AND E-E ARE SHOWN ON SHEET 4/5.
 SECTIONS F-F AND G-G ARE SHOWN ON SHEET 5/5.
 SEE SHEET 5/5 FOR PEDESTAL DETAILS.

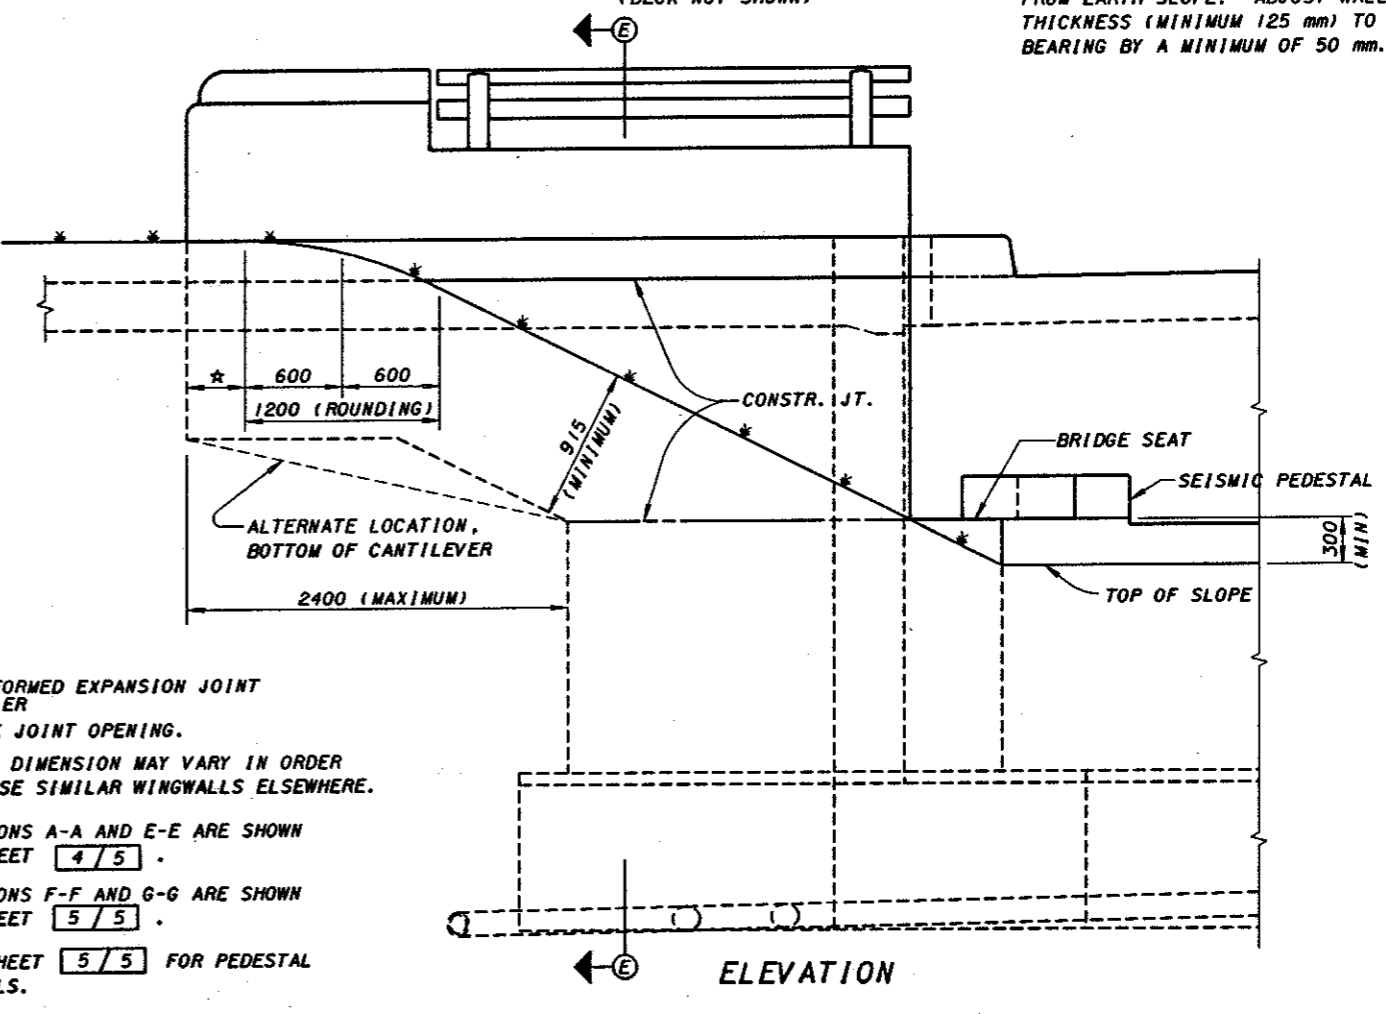

ELEVATION

DESIGN AGENCY	BUREAU OF BRIDGES AND STRUCTURAL DESIGN
STATE OF OHIO DEPARTMENT OF TRANSPORTATION	DATE 3-20-95
ENGINEER OF BRIDGES	ENGINEER OF BRIDGES
DESIGNED	MPB/LMW
CHECKED	NAA/JJS
DESIGNED	CPD/SAM
DRIVER	NRB/SAM
REVISIONS	A-1-69M
STANDARD	U TYPE ABUTMENTS FOR BRIDGES WITH SIDEWALK PARAPET RAILING
3/5	