




DETAIL A




DETAIL B




DETAIL C

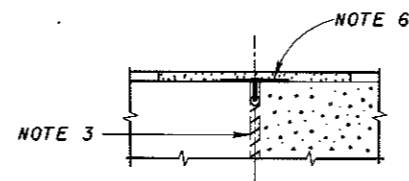


DETAIL D

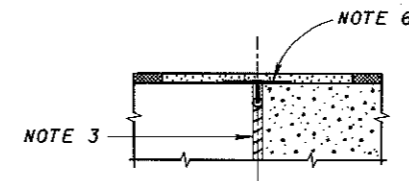

DETAIL E

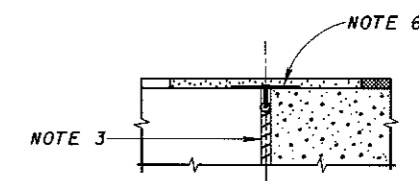


DETAIL F

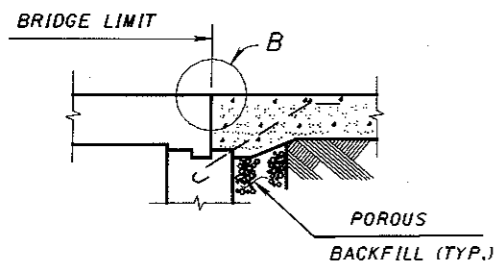


ON SLAB BRIDGES

CONCRETE WEARING SURFACE ON BRIDGE DECK AND APPROACH SLAB

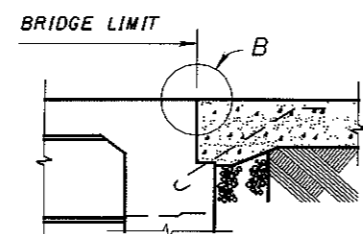

ON BRIDGES WITH INTEGRAL CONSTRUCTION (SEMI-INTEGRAL SIMILAR)

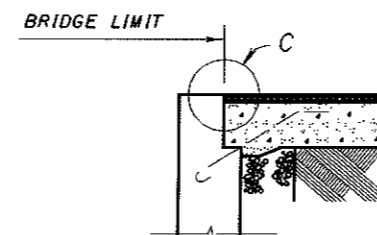

APPROACH SLAB SUPPORTED ON ABUTMENT BACKWALL

NOTE 1: PREFORMED ELASTOMERIC COMPRESSION JOINT SEAL, 705.11 (1 1/4" WIDE FOR A 1/2" WIDE GROOVE) PLACED IN 1/2" x 2 1/4" GROOVE.


NOTE 2: PREFORMED ELASTOMERIC COMPRESSION JOINT SEAL, 705.11 (1 1/4" WIDE FOR A 1/2" WIDE GROOVE) PLACED IN 1/2" x 2 1/4" GROOVE.

NOTE 3: 1" PREFORMED EXPANSION JOINT FILLER, 705.03.


NOTE 4: TYPE "A" WATERPROOFING.

NOTE 5: SEE PLAN INSERT SHEET, "ABUTMENT JOINTS IN BITUMINOUS CONCRETE, BOX BEAM BRIDGES."


NOTE 6: SEE PLAN INSERT SHEET, "POLYMER MODIFIED ASPHALT EXPANSION JOINT SYSTEM."

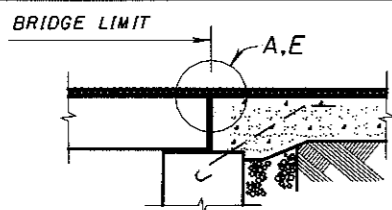

ON PRESTRESSED CONCRETE BOX BEAM BRIDGES

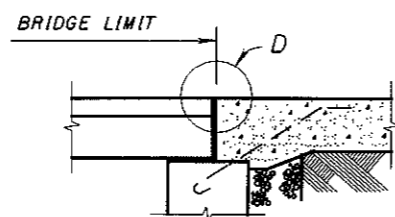

ON PRESTRESSED CONCRETE BOX BEAM BRIDGES

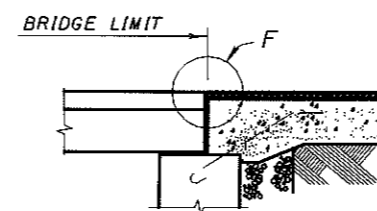


ON PRESTRESSED CONCRETE BOX BEAM BRIDGES

CONCRETE WEARING SURFACE ON BRIDGE DECK ONLY

TYPE "A" WATERPROOFING SHALL NOT EXTEND ABOVE THE BOTTOM OF THE GROOVE INTO WHICH THE PREFORMED ELASTOMERIC JOINT SEAL IS TO BE PLACED. IT SHALL BE APPLIED TO THE ENTIRE AREA OF THE ABUTMENT OR SUPERSTRUCTURE WHICH COMES INTO CONTACT WITH THE APPROACH SLAB.


FOR PRESTRESSED CONCRETE BOX BEAM BRIDGES WITH ASPHALT CONCRETE ON BOTH BRIDGE DECK AND APPROACH SLAB, THE TOP OF APPROACH SLAB AT THE BRIDGE END SHALL BE CONSTRUCTED TO THE LEVEL OF THE TOP OF THE BEAMS TO FACILITATE WATERPROOFING OF THE JOINT. THE THICKNESS OF ASPHALT CONCRETE AT THE APPROACH END OF THE SLAB SHALL BE THE THICKNESS OF ASPHALT CONCRETE USED ON THE ROADWAY PAVEMENT. THE THICKNESS OF ASPHALT CONCRETE SHALL VARY UNIFORMLY, IF NECESSARY, IN THE LENGTH OF THE APPROACH SLAB. THE SUBGRADE (SUBBASE) SHALL BE GRADED TO PERMIT THE BOTTOM OF THE APPROACH SLAB TO BE PARALLEL TO THE TOP.

FOR STRUCTURES HAVING ASPHALT CONCRETE WEARING SURFACE ON BOTH BRIDGE DECK AND APPROACH SLABS AND WHERE NO DECK EXPANSION DEVICES, INCLUDING THE POLYMER MODIFIED ASPHALT EXPANSION JOINT, ARE PROVIDED, THE DECK MEMBRANE WATERPROOFING SHALL EXTEND BEYOND THE BRIDGE LIMITS A DISTANCE OF 2'-0".

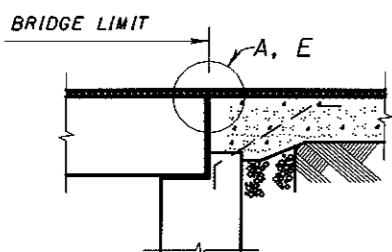

APPROACH SLAB SUPPORTED ON ABUTMENT BACKWALL

ASPHALT CONCRETE WEARING SURFACE ON BRIDGE DECK AND APPROACH SLAB

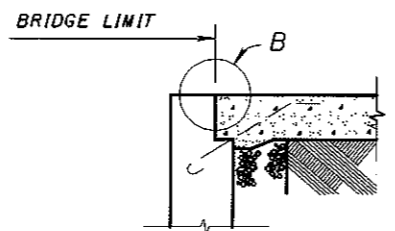

APPROACH SLAB SUPPORTED ON ABUTMENT BACKWALL

CONCRETE WEARING SURFACE ON BRIDGE DECK AND APPROACH SLAB

⊕ - THE APPROACH SLAB SEAT FOR THIS PRESTRESSED CONCRETE BOX BEAM BRIDGE IS SHOWN AT THE SAME ELEVATION AS THE BEAM SEAT. HOWEVER, IT MAY ACTUALLY BE HIGHER OR LOWER THAN THE BEAM SEAT DEPENDING ON THE BOX BEAM DEPTH.