
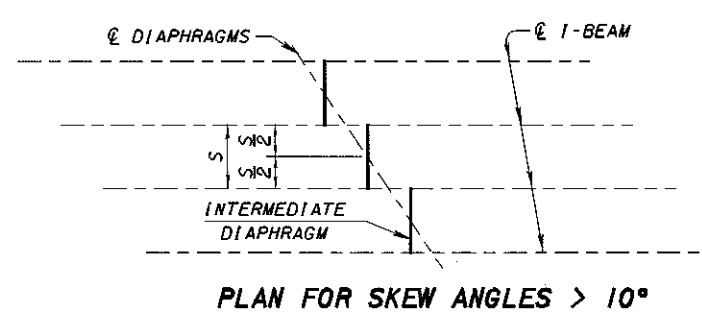


BEARING ORIENTATION AT ABUTMENTS

LEGEND

- † - DISTANCE SHALL BE MEASURED FROM THE LARGER OF THE TOP OR BOTTOM FLANGE WIDTH.
- ❏ - SEE STANDARD DRAWING EXJ-6-95 FOR DIMENSION DEFINITION.
- N - LARGER OF $\begin{cases} 4" + W_1 \sin \theta + 8" \cos \theta \\ 4" + \frac{1}{2} W_1 \sin \theta + \frac{1}{2} W_2 \sin \theta + 8" \cos \theta \\ 18" \end{cases}$
- W_1 - BOTTOM FLANGE WIDTH
- W_2 - TOP FLANGE WIDTH
- T - THICKNESS OF WEB
- K - $\frac{1}{2} W_2 + 15"$
- ⊛ - THIS DIMENSION IS MEASURED FROM THE VERTICAL FACE OF THE END DIAPHRAGM TO THE NEAREST POINT ON THE END OF THE BEAM.
- * - MEASURED TO STEEL LOAD PLATE IF STEEL LOAD PLATE IS USED, OTHERWISE MEASURED TO ELASTOMERIC BEARING.

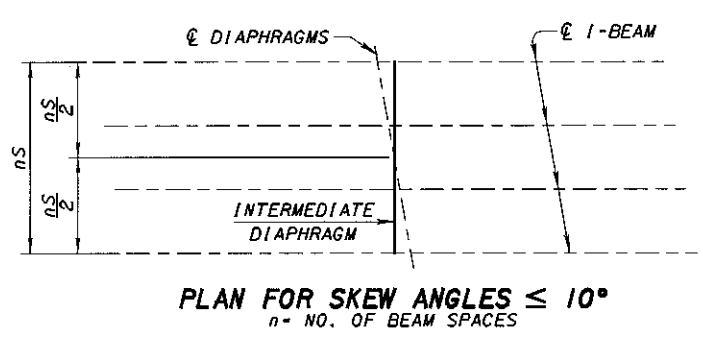

SEE SHEET 4/8 FOR BEARING DETAILS.
 SEE SHEET 5/8 FOR CAST-IN-PLACE CONCRETE DIAPHRAGMS
 SEE SHEET 6/8 FOR STEEL INTERMEDIATE DIAPHRAGMS.