


CROSS-SECTION OF PAVEMENT

ROCK ASPHALT

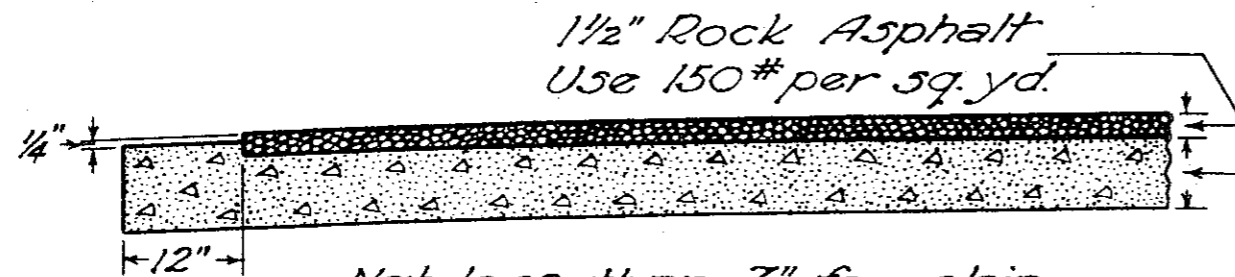


1 1/2" Rock Asphalt
Use 150# per sq. yd.

Not less than 7" for plain concrete and 6" for reinforced concrete.
Paint coat over concrete of asphalt paint.

Curb to be 1/4" below edge of wearing surface.

SHEET ASPHALT

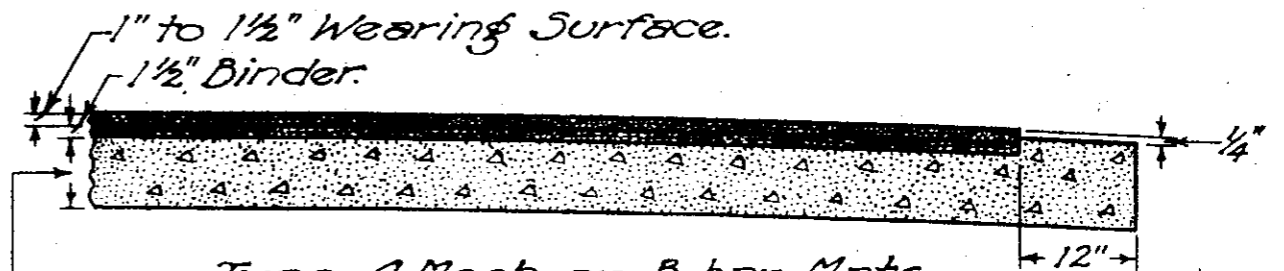

1" to 1 1/2" Wearing Surface.
1 1/2" Binder.

Type A Mesh or B bar Mats if reinforced.
Width of right-of-way 60 feet or more.

CONCRETE :- Item B-5, General Specifications.
SHEET ASPHALT AND BINDER :- Item T-6, General Specification.
ROCK ASPHALT :- Item T-12.
GROWTH DETAIL :- See Construction Drawing No. 144.
SHOULDERS, SLOPES AND DITCHES :- See Construction Drawing No. 143.

BUREAU OF CONSTRUCTION
OHIO
DEPARTMENT OF HIGHWAYS

**SHEET OR ROCK
ASPHALT
ON CONCRETE BASE**

STANDARD
CONSTRUCTION DRAWING **135**
FEB. 13, 1930

REVISED

APPROVED *R.S.B.* CHIEF ENGR. CONST.