




TYPE I

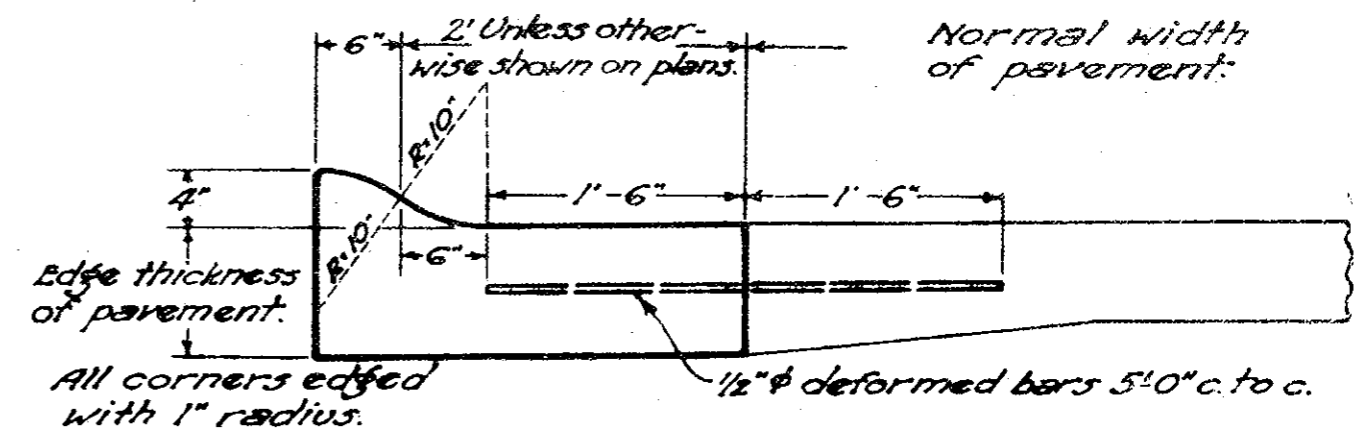

TYPE III

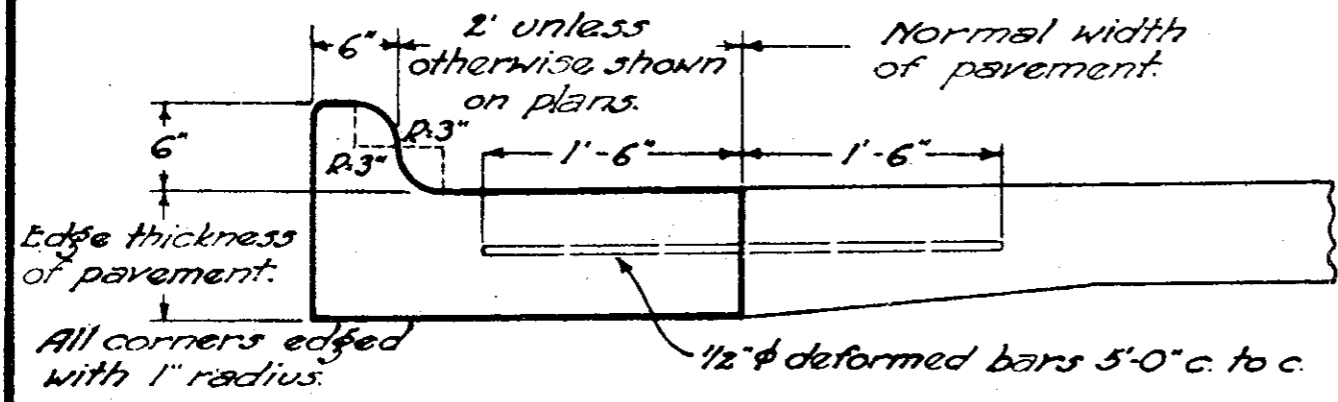

TYPE II

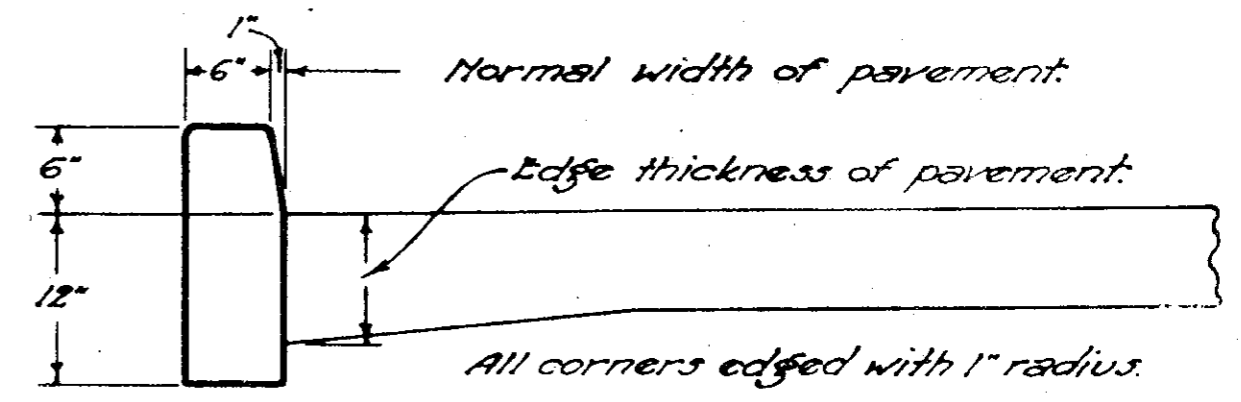

TYPE IV

Type IV may be used when finishing machine is available for entire width desired between curbs. If width of finishing machine is less than desired width between curbs use Type I, II or III.

In the construction of all curbs the entire mixture shall be of uniform consistency and all portions of the curb shall be placed in one operation. False finish or plastering of forms in advance of placing backing will not be allowed. The exposed surface of the curb shall be rubbed as provided for concrete curb Item I-6.

BUREAU OF CONSTRUCTION OHIO DEPARTMENT OF HIGHWAYS		REVISED 7-30-30
<h2>STANDARD CURBS</h2>		
STANDARD CONSTRUCTION DRAWING 129 SEPT. 17, 1929		
APPROVED <i>[Signature]</i>		CHIEF ENGR. CONST.