
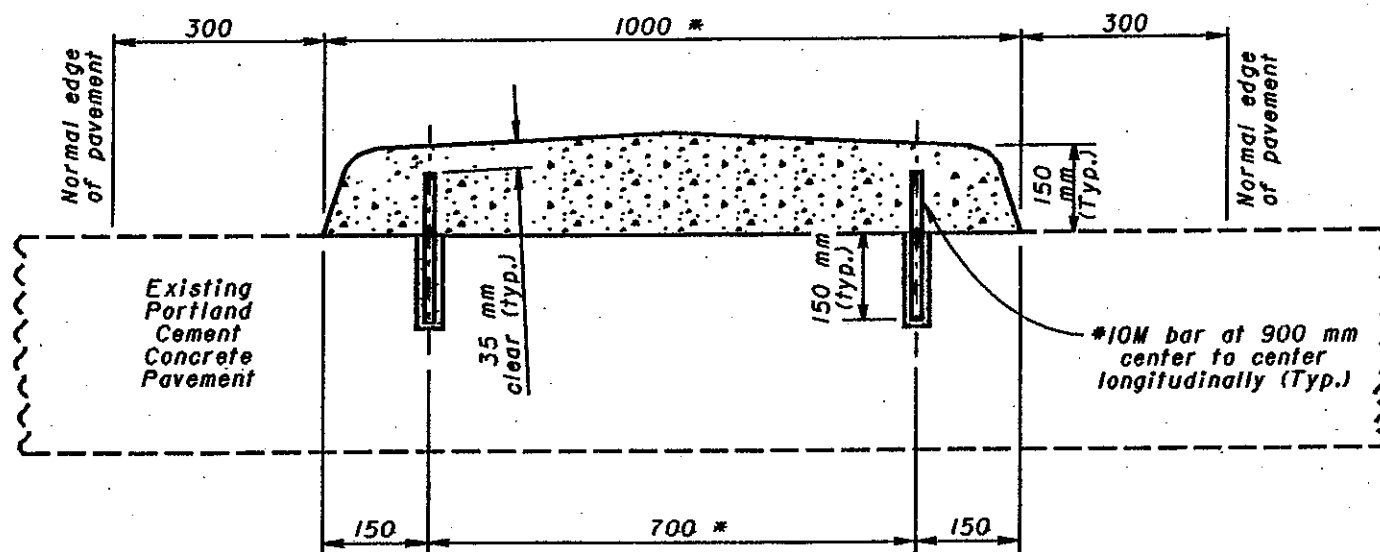
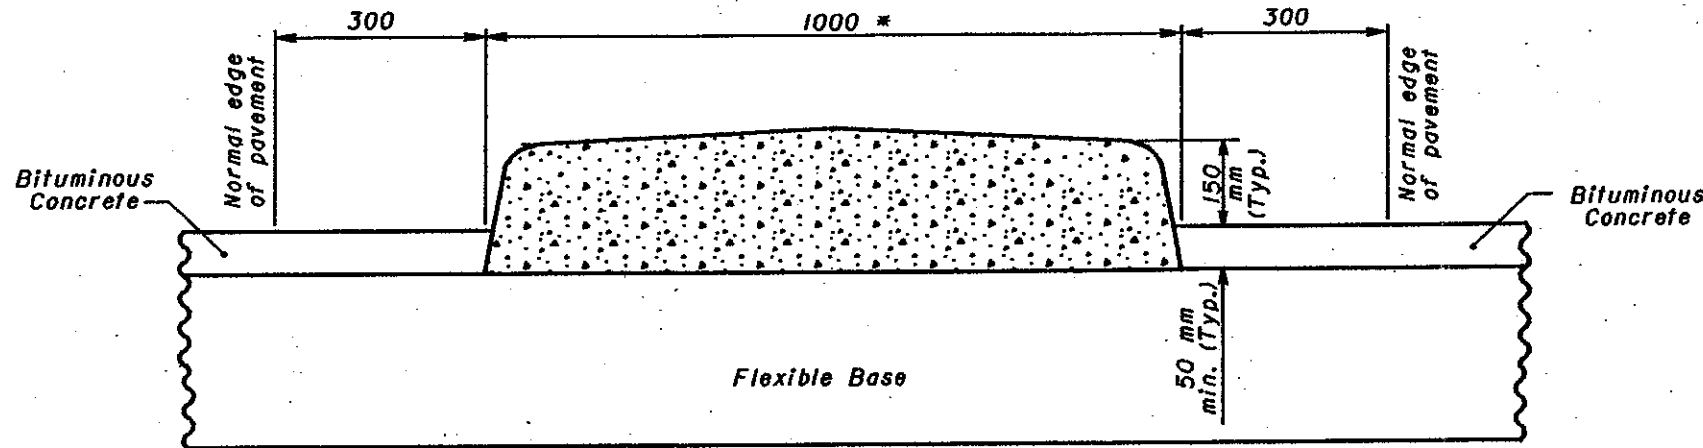


STANDARD TRAFFIC DIVIDERS

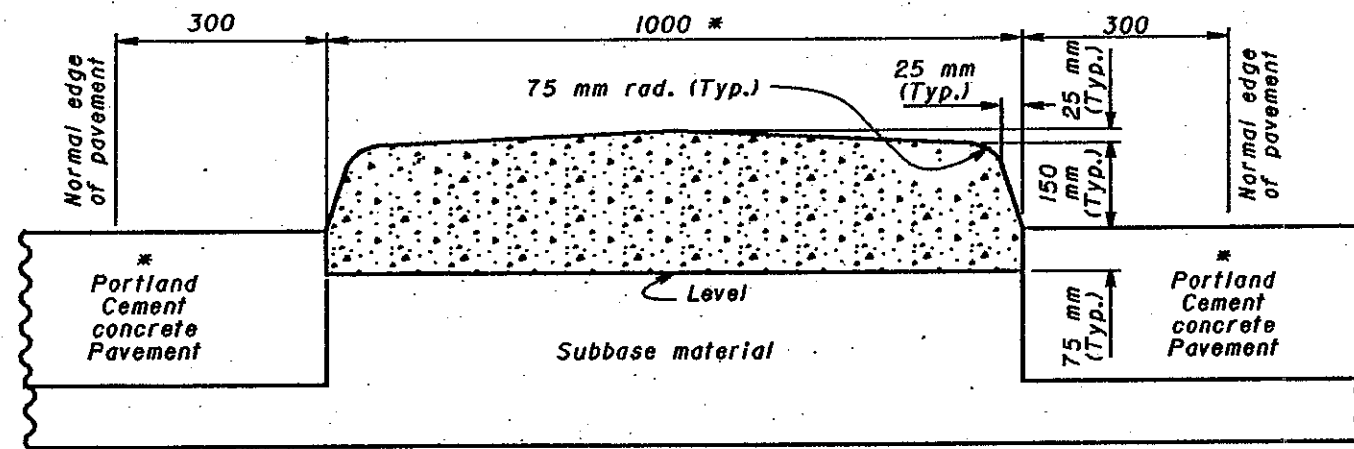

CONCRETE MEDIANS

NOTES

CONCRETE MEDIAN PAVEMENT

JOINTS: 6 mm contraction joints shall be constructed at 3 m intervals in accordance with pertinent provisions of CMS 609.04. For additional specifications see CMS 612.

METHOD OF INSTALLATION: When traffic dividers are to be installed on existing Portland Cement Concrete Pavement the surface shall be clean, dry and free of any loose material.

ANCHORS AND GROUT: For median widths of 450 mm or less use one #10M rebar spaced at 900 mm center to center.

For additional specifications see Supplemental Spec. 852.

LEGEND

* Unless otherwise shown in the plans.

All dimensions are in millimeters unless otherwise noted.



This Drawing Replaces MC-6.

BUREAU OF LOCATION AND DESIGN
OHIO DEPARTMENT OF TRANSPORTATION

TRAFFIC
DIVIDERS

DATE
6-30-95

STANDARD
CONSTRUCTION DRAWING RM-3.1M

APPROVED *D.K. Hulman*
ENGR., L & D