DESIGN NOTES

1. DESIGN SPECIFICATIONS: "STANDARD SPECIFICATIONS FOR HIGHWAY BRIDGES" ADOPTED BY THE AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS, 1996, INCLUDING THE 1997 THROUGH 2001 INTERIM SPECIFICATIONS AND THE ODOT BRIDGE DESIGN MANUAL.

2. DESIGN DATA:

LIVE LOADING - HS25 AND THE ALTERNATE MILITARY LOADING

SUPERIMPOSED DEAD LOADS - ASPHALT OVERLAY = 3 1/2" THICK (AVG.)
RAILING WEIGHT = 90 PLF PER RAIL (TST-1-99)
FWS = 60 PSF

DEAD LOAD - DIAPHRAGM WEIGHT IS BASED ON 3'-0" LONG DIAPHRAGMS.

CONCRETE - MIN. COMPRESSIVE STRENGTH AT 28 DAYS f'_c = 7000 P.S.I.
MIN. COMPRESSIVE STRENGTH AT TIME OF INITIAL PRESTRESS f'_c = 5000 P.S.I.

REINFORCING STEEL - GRADE 60
MINIMUM YIELD STRENGTH 60,000 P.S.I.

PRESTRESSING STEEL - ASTM A416
1/2" DIAMETER
A_s = 0.167 SQ. IN.
f_s = 270,000 P.S.I.
E_s = 28,500 K.S.I.
R_H = 70%
INITIAL STRESS 0.75 f'_s = 202,500 P.S.I.
INITIAL TENSION LOAD = 33,818 LBS/STRAND

3. PRESTRESS LOSSES HAVE BEEN COMPUTED IN ACCORDANCE WITH AASHTO ARTICLE 9.16.2. TOTAL LOSSES DETERMINED BY THIS METHOD MAY BE EXPRESSED AS $\Delta f_s = 11{,}175 \cdot (25{,}650/E_{ci} + 11.4) f_{cir} - 6.65 f_{cds}$

4. INTERMEDIATE DIAPHRAGMS:
SPAN ≤ 50 FT. USE ONE DIAPHRAGM
50 FT. < SPAN ≤ 75 FT. USE TWO DIAPHRAGMS
SPAN > 75 FT. USE THREE DIAPHRAGMS

5. CAMBER DATA GIVEN IS THE CALCULATED CAMBER AT TIME OF PAVING (1.8B - 1.85C), WHERE B = CAMBER DUE TO PRESTRESSING AT RELEASE AND C = DEFLECTION DUE TO WEIGHT OF BEAM INCLUDING DIAPHRAGMS. D = CALCULATED DEFLECTION AT MIDSPAN DUE TO A 3 1/2" THICK ASPHALT WEARING SURFACE AND TWO (2) BRIDGE RAILS WEIGHING 90LB/FT. PER RAIL. THE VALUE SHOWN IS THE MAXIMUM INITIAL SUPERIMPOSED DEAD LOAD DEFLECTION FOR GROUP C ROADWAY WIDTHS.

6. THIS DRAWING PROVIDES INFORMATION FOR THE DESIGNER AND IS NOT INTENDED FOR USE AS A STANDARD DRAWING. REFERENCE SHALL BE MADE TO STANDARD DRAWING PSBD-1-93 FOR DETAILS OF BEAMS.

7. ROADWAY WIDTH: THE BEAMS ON THIS SHEET ARE DESIGNED FOR THE FOLLOWING ROADWAY WIDTHS, MEASURED BETWEEN FACE OF BRIDGE RAILS:

GROUP C
48 FT. < WIDTH ≤ 72 FT.

8. INTERPOLATION: THE DESIGN CURVES SHALL BE USED TO DETERMINE THE NUMBER OF STRANDS REQUIRED FOR BEAM SPANS NOT SPECIFICALLY LISTED IN THE DESIGN DATA TABLE. HOWEVER, THE NUMBER OF STRANDS USED SHALL ALWAYS BE ROUNDED UP TO THE NEAREST EVEN NUMBER. THE REMAINING DESIGN DATA MAY BE OBTAINED FROM THE TABLE BY USING STRAIGHT LINE INTERPOLATION BETWEEN GIVEN VALUES. DO NOT EXTRAPOLATE BEYOND THE CURVES OR GIVEN DATA.

9. NARROW ROADWAY: THESE DESIGNS SHALL NOT BE USED FOR ROADWAY WIDTHS LESS THAN 24 FT. SPECIAL DESIGN IS REQUIRED FOR ROADWAY WIDTHS LESS THAN 24 FT.

DESIGN CURVES (SEE NOTE 8)

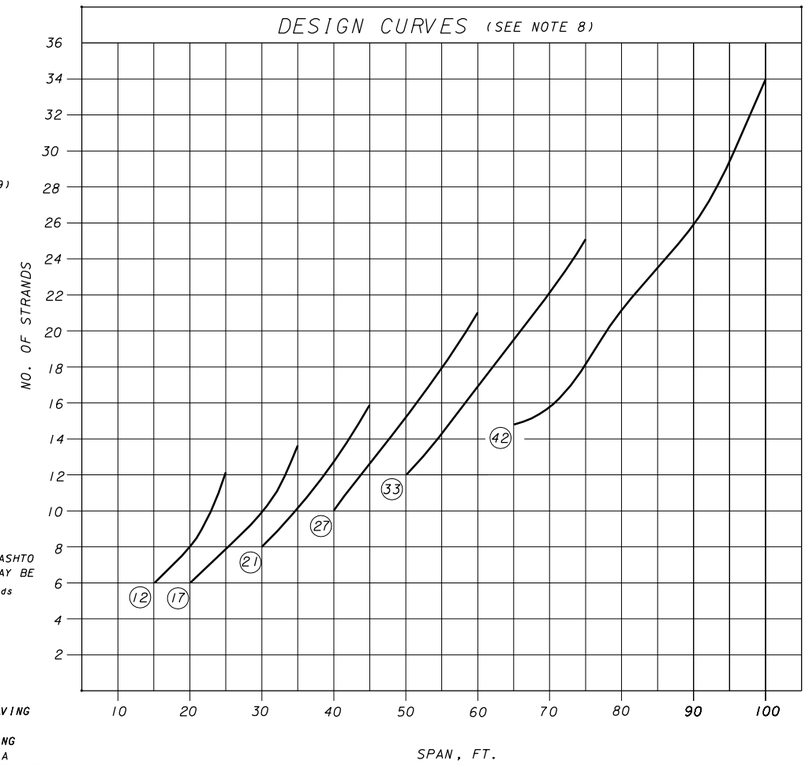

GROUP C DESIGN DATA (SEE NOTE 7)

BOX	SPAN c/c BRG. FT.	MID-SPAN e in.	NO. OF STRANDS	STRAND LOCATION FROM BOTTOM OF BOX 2"	4"	6"	8"	10"	12"	14"	NUMBER AND LENGTH OF STRANDS DEBONDED 1'-6"	2'-6"	3'-6"	4'-6"	TENSILE BARS AT BOTTOM NO.	SIZE	TENSILE BARS AT TOP FULL LENGTH NO.	SIZE	ADDITIONAL BARS EACH END NO.	SIZE	LENGTH▲	CAMBER/DEFLECTION DATA IN. (SEE NOTE 5) B	C	1.8B-1.85C	D
B12-48	15	3.97	6	6											2	5	6	4	-	-	-	0.105	0.023	0.146	0.006
	20	3.97	8	8											2	5	6	4	-	-	-	0.250	0.072	0.317	0.020
	25	3.97	12	12											2	5	6	4	2	4	4'-3"	0.581	0.177	0.718	0.048
B17-48	20	6.55	6	6											2	5	6	4	-	-	-	0.116	0.028	0.157	0.007
	25	6.55	8	8											2	5	6	4	-	-	-	0.242	0.070	0.306	0.018
	30	6.55	10	10											2	5	6	4	-	-	-	0.435	0.142	0.520	0.037
	35	6.55	14	14											2	5	6	4	2	4	3'-9"	0.818	0.261	0.990	0.069
B21-48	30	8.57	8	8											2	5	6	4	-	-	-	0.259	0.090	0.300	0.021
	35	8.57	10	10											2	5	6	4	-	-	-	0.439	0.165	0.485	0.039
	40	8.57	14	14											2	5	6	4	2	4	4'-6"	0.793	0.278	0.913	0.066
	45	8.57	16	16											2	5	6	4	4	4	5'-3"	1.142	0.444	1.234	0.106
B27-48	40	11.61	10	10											2	5	4	5	-	-	-	0.392	0.160	0.410	0.033
	45	11.61	14	14											2	5	4	5	2	5	4'-9"	0.686	0.254	0.765	0.053
	50	11.61	16	16											2	5	4	5	2	5	5'-6"	0.964	0.385	1.023	0.081
	55	11.61	18	18											2	5	4	5	4	5	6'-3"	1.308	0.584	1.274	0.119
	60	11.43	22	20	2										2	5	4	5	4	5	7'-0"	1.854	0.821	1.818	0.168
B33-48	50	14.61	12	12											2	5	4	5	2	5	3'-9"	0.552	0.253	0.526	0.048
	55	14.61	16	16											2	5	4	5	4	5	6'-3"	0.881	0.388	0.868	0.071
	60	14.61	18	18											2	5	4	5	4	5	7'-0"	1.175	0.543	1.110	0.100
	65	14.61	20	20											2	5	4	5	6	5	7'-6"	1.527	0.742	1.376	0.138
	70	14.43	22	20	2										2	5	4	5	6	5	7'-6"	1.919	0.990	1.623	0.186
	75	13.99	26	20	4	2									2	5	4	5	6	5	7'-9"	2.506	1.296	2.113	0.245
B42-48	65	19.13	16	16											2	5	4	5	4	5	7'-3"	0.884	0.467	0.727	0.075
	70	19.13	18	18											2	5	4	5	6	5	8'-0"	1.150	0.622	0.919	0.101
	75	19.13	20	20											2	5	4	5	6	5	8'-9"	1.462	0.813	1.128	0.134
	80	18.95	22	20	2										2	5	4	5	8	5	9'-0"	1.808	1.089	1.240	0.173
	85	18.80	24	20	4										2	5	4	5	8	5	9'-3"	2.203	1.376	1.420	0.220
	90	18.51	26	20	4	2									2	5	4	5	8	5	9'-3"	2.631	1.717	1.559	0.277
	95	17.66	30	20	4	2	2	2							2	5	4	5	8	5	8'-0"	3.210	2.116	1.863	0.344
	100	16.54	34	20	4	2	2	2	2	2	2				2	5	4	5	4	5	7'-0"	3.762	2.582	1.995	0.422

▲ - LENGTH MEASURED FROM ENDS OF BEAM

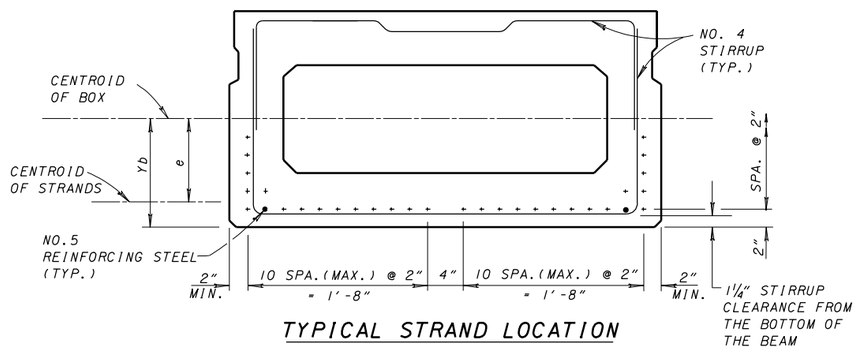

TYPICAL STRAND LOCATION

STRANDS SHALL BE PLACED PER BDM 302.5.1.2.b AND SHALL BE DISTRIBUTED SYMMETRICALLY OVER THE BEAM WIDTH. STRAND PATTERN AND THE DEBONDED LENGTHS SHALL BE SYMMETRICAL ABOUT VERTICAL ℄ OF BEAM. DEBONDED STRANDS SHALL BE IN BOTTOM LAYER. LENGTH OF STRANDS TO BE DEBONDED IS MEASURED FROM ENDS OF BEAM. TWO BOTTOM REINFORCING BARS SHALL BE LOCATED AT THE CORNER OF THE STIRRUPS. A LAP OF 3'-3" FOR #5 BARS AND 4'-0" FOR #6 BARS SHOULD BE PROVIDED WITHIN THE OUTER QUARTER OF THE SPAN , IF NEEDED.

SECTION PROPERTIES

BOX	A $IN.^2$	I $IN.^4$	Yb IN.	St $IN.^3$	Sb $IN.^3$
B12 - 48	567.8	6850	5.97	1136	1147
B17 - 48	554.3	18307	8.55	2167	2141
B21 - 48	606.3	32456	10.57	3112	3071
B27 - 48	678.8	64649	13.61	4828	4750
B33 - 48	733.5	108150	16.61	6599	6511
B42 - 48	823.5	198418	21.13	9507	9390

REVISIONS 10-17-03

STATE OF OHIO
DEPARTMENT OF TRANSPORTATION
OFFICE OF STRUCTURAL ENGINEERING

3 / 6

ORIGINAL DESIGN PREPARED BY:
URS CORPORATION - OHIO

DESIGN DATA FOR PRESTRESSED CONCRETE BRIDGE
GROUP C ROADWAY WIDTH
NON-COMPOSITE
48" ADJACENT BOX BEAMS
WITH STRAIGHT STRANDS

DESIGNED	DRAWN	CHECKED	REVIEWED	DATE
MDP	SFW	MAC	RSC	12/20/02